


1 - 2 = normally closed
 (P pressure = 0)
 1 - 3 = normally open

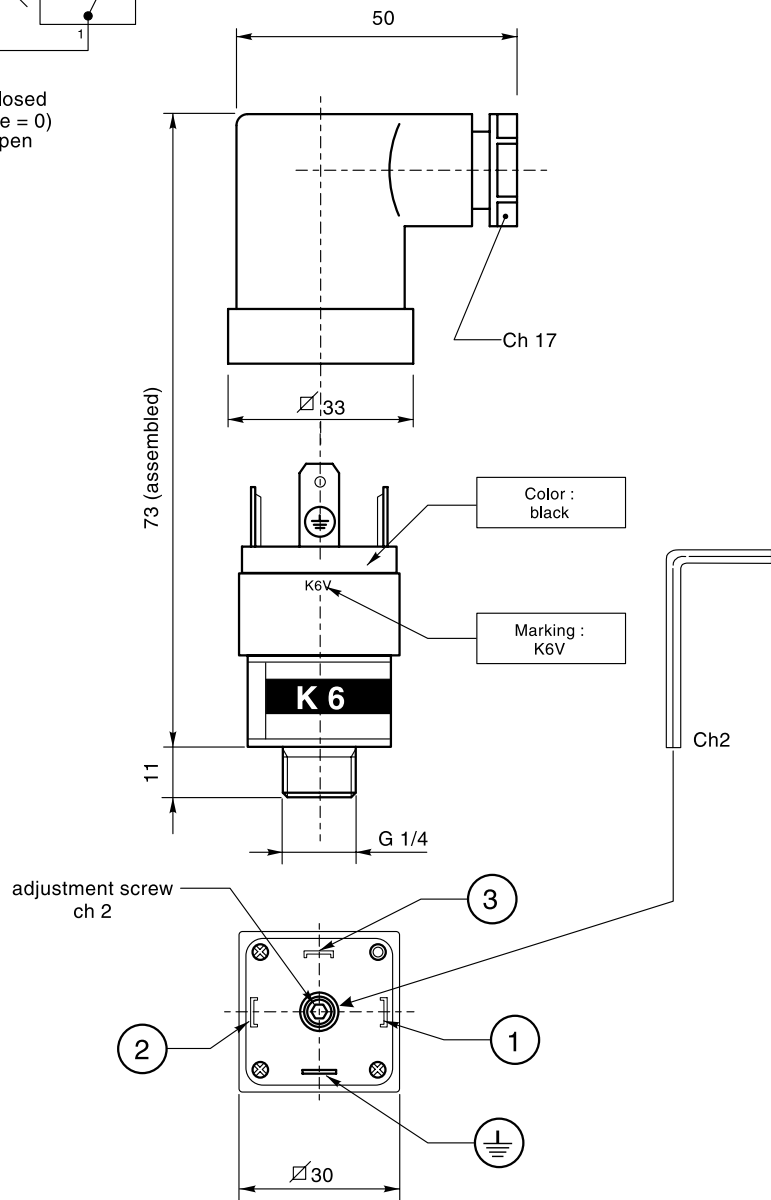

TECHNICAL SPECIFICATION	
MAXIMUM CONTACT RATING	0,5 A / 250 V ca
INSULATION CLASS	IP 65
COMMUTATION FREQUENCY	90 cycles/min
WORKING TEMPERATURE	-25 °C ÷ +85 °C
ENDURANCE	10 ⁶ cycles at 70 bar at 20°
WORKING PRESSURE RANGE	10 ÷ 100 bar
MAXIMUM PRESSURE	300 bar
SWITCHING ACCURACY	± 4% bar
RESET PRESSURE (HISTERESYS)	10 ÷ 15 % of set pressure