


1 - 2 = normally closed
 (P pressure = 0)
 1 - 3 = normally open

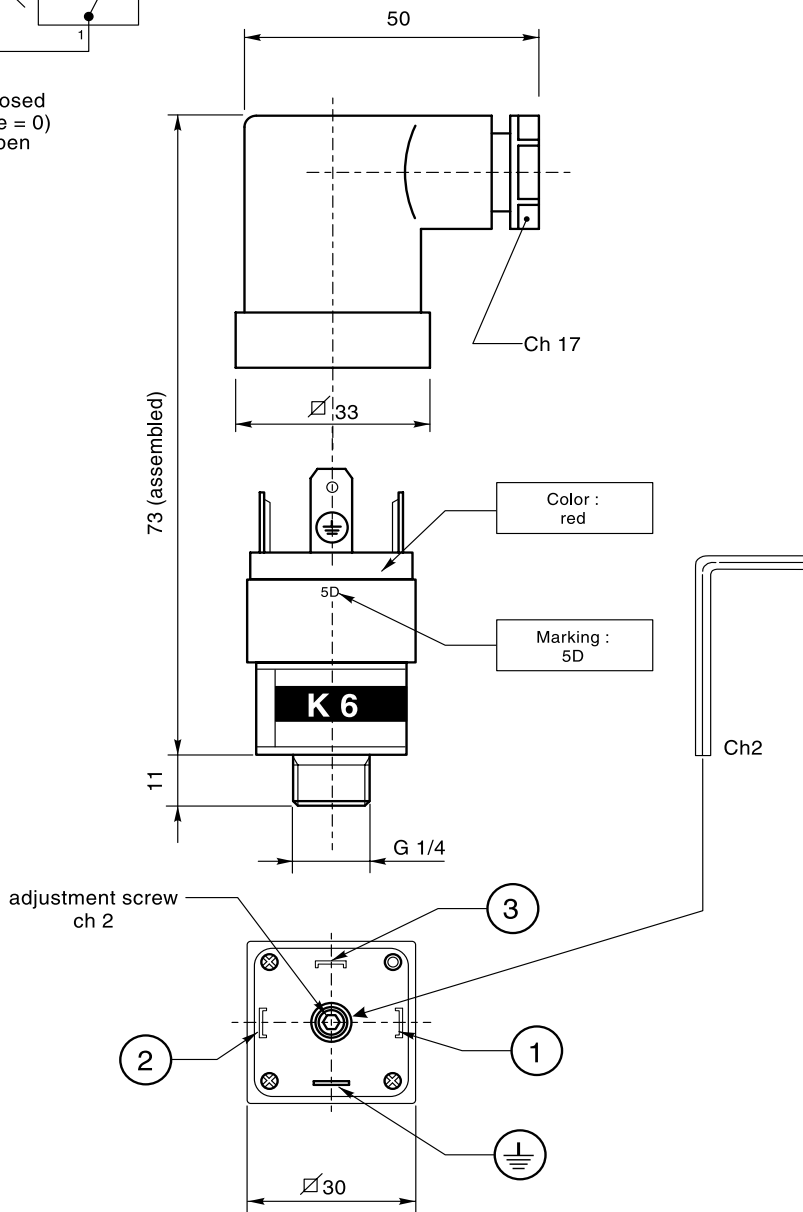

TECHNICAL SPECIFICATION	
MAXIMUM CONTACT RATING	alternate current 250V - max 0,5 A
INSULATION CLASS	IP 65
COMMUTATION FREQUENCY	90 cycles/min
WORKING TEMPERATURE	-25 °C ÷ +85 °C
ENDURANCE	10 ⁶ cycles - 70 bar - 20°
WORKING PRESSURE RANGE	1 ÷ 12 bar
MAXIMUM PRESSURE	300 bar
SWITCHING ACCURACY	± 4 % of set pressure
FIXED VALUE (HISTERESYS)	~ 15 % of set valve