


**IDRAULIC SCHEMA**

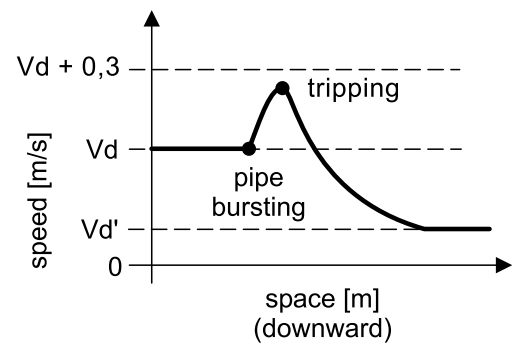

**WORKING DIAGRAM**

VALVE TYPE	flow range [l/min]		A	B	C	D	øE	øF	øf	Ch1	Ch2	Ch3	R	wt
	min	max												[kg]
VC 3006 / A - 1"1/4	20	350	70	55	166	57	(1)	25	9	4	13	17	G 1"1/4	4
VC 3006 / A - 1"1/2	173	525	70	55	173	61		30	9	4	13	17	G 1" 1/2	4,5
VC 3006 / A - 2"	425	700	80	65	194	68		40	11	4	13	17	G 2"	6

(1) size of by-pass has to be calculated for each installation according to speed after intervention, static pressure and jack size. Please specify these data on order.

- operating pressure = 12 ÷ 60 bar
- operating temperature = 5 ÷ 70 °C
- kinematic viscosity = 16 ÷ 240 cSt

**For information not included in this data sheet please consult GMV**