


HYDRAULIC SCHEMA

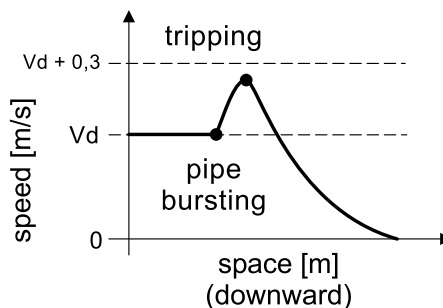

WORKING DIAGRAM

VALVE TYPE	flow range [l/min]		A	B	C	D	øF	øf	Ch1	Ch2	Ch3	R	wt.
	min	max	[mm]										[kg]
VC 3006/B - 3/4"	8	150	50	36	135	44	18	8,5	3	10	13	G 3/4"	2

- operating pressure = 12 ÷ 60 bar
- operating temperature = 5 ÷ 70 °C
- kinematic viscosity = 16 ÷ 240 cSt

For information not included in this data sheet please consult GMV

