


HYDRAULIC SCHEMA

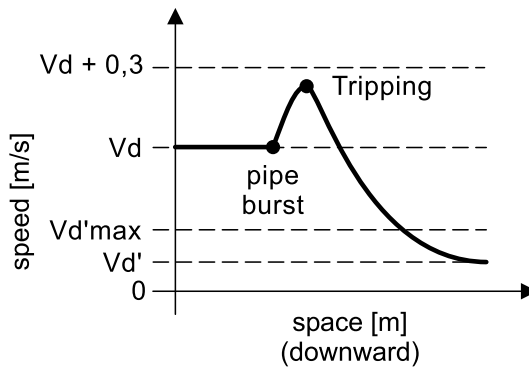

WORKING DIAGRAM

VALVE TYPE	flow range [l/min]		A	B	C	D	øF	øf	Ch1	Ch2	Ch3	R	wt
	min	max											[kg]
VC 3006 / R - 1"1/4	20	350	70	55	166	57	25	9	4	13	17	G 1"1/4	4
VC 3006 / R - 1"1/2	173	525	70	55	173	61	30	9	4	13	17	G 1" 1/2	4,5
VC 3006 / R - 2"	425	700	80	65	194	68	40	11	4	13	17	G 2"	6

- operating pressure = 12 ÷ 60 bar
- operating temperature = 5 ÷ 70 °C
- kinematic viscosity = 16 ÷ 240 cSt

For information not included in this data sheet please consult GMV



PIPE RUPTURE VALVE "VC 3006/R"
(with adjustable By-pass)

data sheet : 05.021/B 1/1
date : 30/04/2013

